

#### XS – A Single Axle Slurry Tanker

A tanker equipped with a hyrdaulic bilge pump, no PTO shaft.

Maneuverable, lightweight, and affordable tanker.

A variety of spreading ramps and pumping arms are available.

Top fill tanker with filling funnel

Funnel descends 50cm into the

tanker, no hatch needed.

Hydraulic gate valve as standard

Injector brackets are standard.

LED light kit.

Lacquered paint.

Available Sizes: 10m<sup>3</sup> & 12m<sup>3</sup>




## Excellent handling characteristics through careful design.

Overall low centre-of-gravity, with tank attached directly to the axle.

Tank has an oval shape.

Design allows for the front to emptied last, to maintain proper weight distribution.

Fitted with two baffles inside.

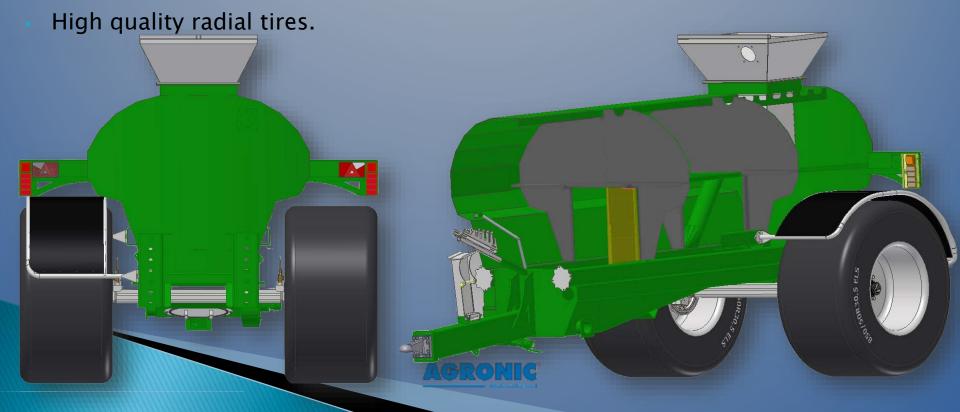

# Three Tire Sizes, & Crab Steering as an Option.

Axles sourced from ADR, fitted with hydraulic brakes.

Tire sizes are: 850/50R30,5, 900/60R32 or 1050/50R32

Tanker has a maximum width of 328 cm.



## The two Biggest Tires with a Tractor Tread Pattern.

#### **Tire Dimensions:**

800/50R30,5 Nokian ELS steel belt diam. 1625 mm, width 862 mm. For use with or without crab steering.
900/60R32 BKT AgriMax Teris, diam. 1893 mm, width 886 mm. For use with only with crab streeting.
1050/50R32 BKT AgriMax Teris, diam. 1893 mm width 1059 mm.



### **Compact Size**

